



Sharp Air Conditioner Error Codes

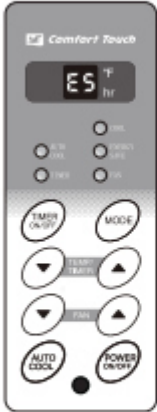

If the display reads "ES" or "AS", a sensor has failed. Contact your Authorized SHARP Service Center.

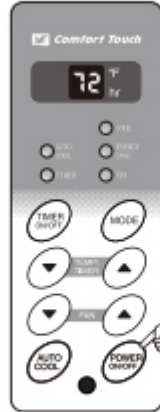

DO THIS:
PRESS POWER ON/OFF

FAULT CODES:


TO TURN UNIT OFF:

TO CHANGE AIR FLOW DIRECTION

The horizontal louvers are used to adjust the UP/DOWN direction of air flow, and the vertical louvers are used to adjust the LEFT/RIGHT direction of air flow for uniform and efficient cooling of the room.



Adjust UP/DOWN air flow

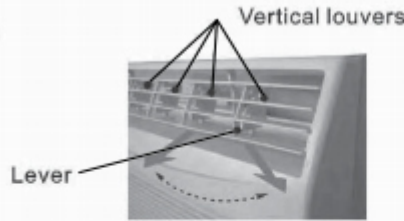

Adjust LEFT/RIGHT air flow

TO EXHAUST AIR FROM THE ROOM



To get fresh air, push the exhaust lever toward the unit.
For maximum performance, the exhaust vent should be closed when cooling.

E7 20 Laser beam sensor trouble (BLACK)

E7 21 Laser beam sensor trouble (CYAN)

E7 22 Laser beam sensor trouble (MAGENTA)

E7 23 Laser beam sensor trouble (YELLOW)

E7 24 Laser beam detection trouble (BLACK)

E7 25 Laser beam detection trouble (CYAN)

E7 26 Laser beam detection trouble (MAGENTA)



E7 27 Laser beam detection trouble (YELLOW)

E7 30 ICU PWB FLASH ROM trouble ICU MAIN PWB Warm-up

E7 90 ICU MAIN PWB – PCU MAIN PWB

E8 0 ICU MAIN PWB – PCU MAIN PWB

E8 1 ICU MAIN PWB – PCU MAIN PWB

F1 0 Communication trouble between PCU

F1 2 Finisher paper exit trouble (Finisher

F1 10 Finisher staple trouble

F1 11 Finisher bundle process trouble

F1 15 Finisher tray lift trouble

F1 19 Finisher alignment trouble (Front side)

F1 20 Finisher alignment trouble (Rear side)

F1 70 PCU PWB – sorter control PWB